



**7.25" ROKKER Series
Saddle Bag Lid Speaker
In-Series Connection Harness**

#HSDR-7252GTM-ISCH

**Installation
Instructions**

Installation Instructions

After installing the J&M Saddle Bag lid speakers on to the Harley saddle bags, plug this connection harness into the corresponding left and right plugs from the saddle bag lid speakers.

Make the in-series connections to the pod position speakers as shown in the wiring diagram below.

Remove the J&M amplifier cooling fan splash cover (if installed) and sealing tape to expose the left and right rear gain controls.

Make note of the factory set position of these controls & then turn both of these gain controls in a clockwise direction, just


slightly and then perform a maximum volume test with a good quality CD, to make sure there is no distortion in the rear speakers when the handlebar volume control is adjusted to maximum.

If distortion is heard at maximum volume, reduce both rear left and right gain controls just slightly and repeat the distortion test

Then reseal the exposed gain controls with scotch tape or similar.

Trim the new included cooling fan splash cover as necessary to fit, then peel back the double-sided tape and reinstall this cover as before.

Fig. A

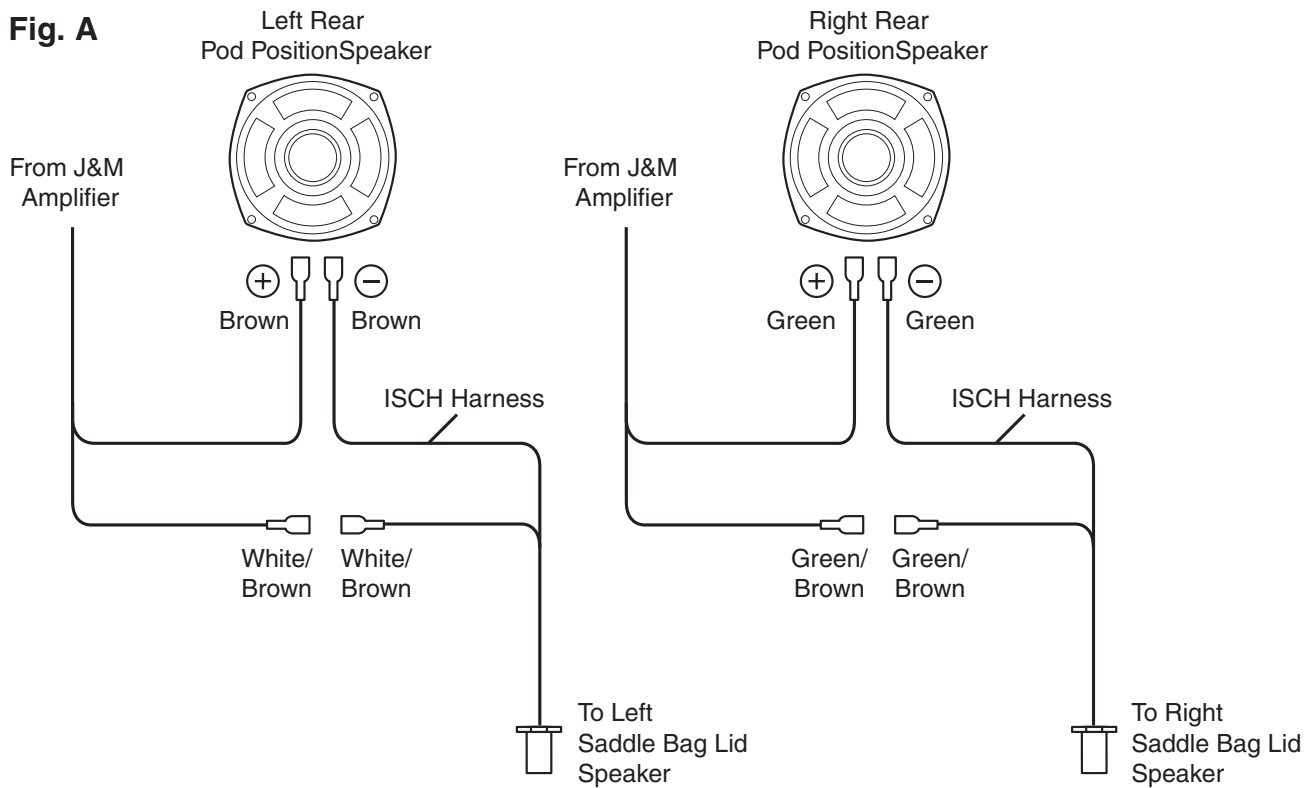

Thank you for the confidence you have shown in J&M Corporation by purchasing one of our innovative products.

If you have any question or comments about this product, you may contact us at USA 1-520-624-7000 Monday thru Friday, 8:00AM thru 5:00PM Mountain Standard Time.



1415 S. Cherry Avenue

Tucson, AZ 85713 U.S.A.

Tel (800) 358-0881

Website: <http://www.jmcorp.com>

E-mail: audio@jmcorp.com